

LEXOR

A division of customDesignTechnologies Ltd

www.customDesignTechnologies.com

Tel: +44 (0)1280 845530 Fax: +44 (0)1280 706900 e-mail: enquiries@lexor.co.uk

Unit B, Nigel Court, Ward Road, Buckingham Road Industrial Estate, Brackley, NN13 7LF, United Kingdom

Dual-In-Line Tapped Delay Network "Dipline" 24 Pin Series L

Basic Specification

Delay Range	50 nS to 2 μ S \pm 5%
Impedance Range	50 Ω to 560 Ω \pm 10%
Number of Sections	20 'M' - derived 'T' sections
Taps	20 at 5% intervals
Rise-time	Better than 10% of Total Delay
Distortion	\pm 10% Max.
Attenuation	1.0dB/ μ S or 0.5dB (whichever is greater)
Working Voltage	50V
Temperature Coefficient of Delay	\pm 200 p.p.m./ $^{\circ}$ C Max
Operating Temperature Range	-50 $^{\circ}$ C to +125 $^{\circ}$ C
Encapsulation	Flame Retardant Epoxy Resin

Selection Table

Delay Time, nS	50 Ω	75 Ω	100 Ω	200 Ω	500 Ω	560 Ω
50	-	-	101	044	-	-
100	022	090	007	011	035	145
150	075	091	102	116	132	146
200	033	003	008	012	060	147
250	076	004	103	027	067	017
300	077	092	104	117	133	148
350	078	049	105	118	134	149
400	024	059	009	119	061	150
450	079	093	106	120	135	151
500	056	031	057	037	043	018
550	080	094	107	121	136	152
600	081	095	108	122	137	072
650	082	006	109	123	138	153
700	083	096	110	124	139	025
800	084	097	111	125	062	154
900	085	098	112	126	140	155
1000	001	002	055	032	013	054
2000	-	-	040	127	-	-

Example; A Dipline 24 Pin Series L, 500nS delay, 200 Ω Impedence, is ordered as L037.

LEXOR


A division of customDesignTechnologies Ltd

www.customDesignTechnologies.com


Tel: +44 (0)1280 845530 Fax: +44 (0)1280 706900 e-mail: enquiries@lexor.co.uk

Unit B, Nigel Court, Ward Road, Buckingham Road Industrial Estate, Brackley, NN13 7LF, United Kingdom

Dual-In-Line Tapped Delay Network "Dipline" 24 Pin Series L Mechanical Detail

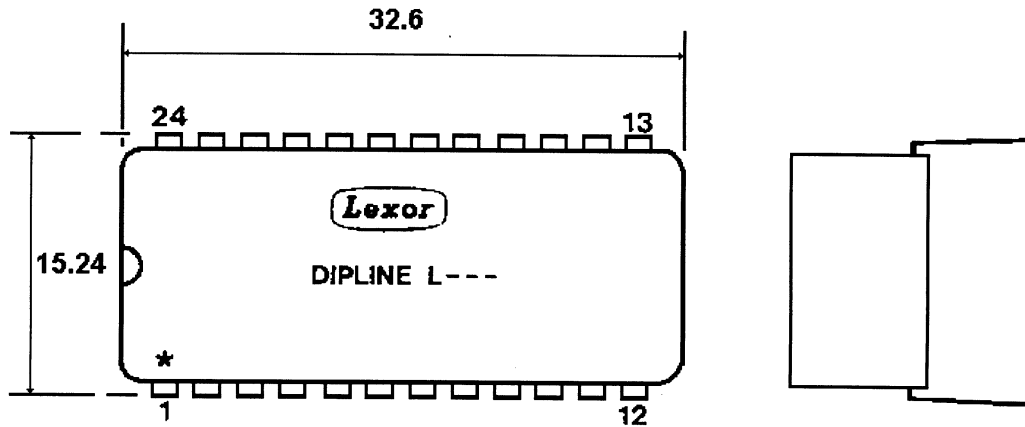


All dimensions in mm

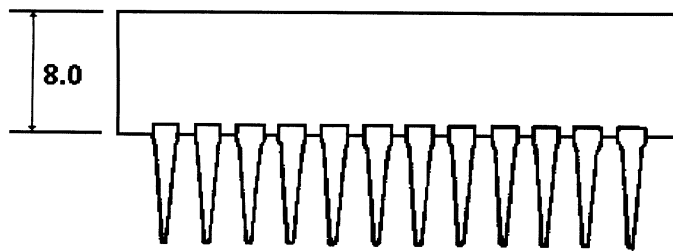

0.1" Pitches

Connection Detail

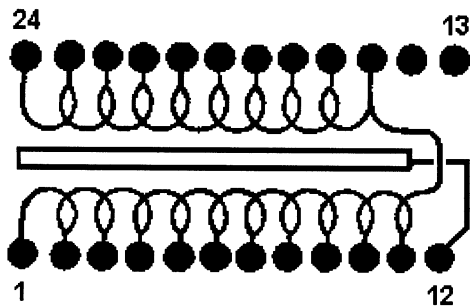

Schematic

Pin No.	Tap No.	Delay %
1	Input	0
2	1	5
3	2	10
4	3	15
5	4	20
6	5	25
7	6	30
8	7	35
9	8	40
10	9	45
11	10	50
12	Earth	Earth
13	Not Connected	N.C
14	Not Connected	N.C
15	11	55
16	12	60
17	13	65
18	14	70
19	15	75
20	16	80
21	17	85
22	18	90
23	19	95
24	20	100